

# Top-Ported Pressure Filter

## HS60/ MHS60



### Features and Benefits

- Full flow reverse flow check valve diverts flow past the element in hydrostatic applications
- Top-ported design capable of handling 100 gpm flow
- Offered in SAE straight thread and flange porting
- Thread on bowl with drain plug for easy element service
- 6000 psi cyclic
- Certified for Offshore Standard DNVGL-OS-D101 "Marine and Machinery Systems and Equipment"
- Contact factory for higher flow applications

**120 gpm**  
**450 L/min**  
**6000 psi**  
**415 bar**

NF30  
NFS30  
YF30  
CFX30  
PLD  
CF40  
DF40  
PF40  
RFS50  
RF60  
CF60  
CTF60  
VF60  
LW60  
KF30  
KF50  
TF50  
KC50  
MKF50  
MKC50  
KC65  
**HS60**  
**MHS60**  
KFH50  
LC60  
LC35  
LC50  
NOF30-05  
NOF-50-760  
FOF60-03  
NMF30  
RMF60  
14-CRZX10  
20-CRZX10


Model No. of filters in photograph is HS6013HZ3F24 and MHS6013HZ3F24.

Flow Rating:	Up to 100 gpm (380 L/min)
Max. Operating Pressure:	6000 psi (415 bar) only for flange ported models
Min. Yield Pressure:	Contact factory
Rated Fatigue Pressure:	6000 psi (415 bar) (only with 4-bolt flange porting)
Temp. Range:	-20°F to 225°F (-29°C to 107°C)
Bypass Setting:	Cracking: 87 psi (5.9 bar)
Porting Head:	Ductile Iron
Element Case:	Steel
Weight of HS60-13H:	75 lbs. (34.2 kg)
Weight of MHS60:	160 lbs. (72.6 kg)
Element Change Clearance:	4.0" (103 mm)

### Filter Housing Specifications

Type Fluid	Appropriate Schroeder Media
High Water Content	All Z-Media® (synthetic)
Invert Emulsions	10 and 25 µ Z-Media® (synthetic)
Water Glycols	3, 5, 10 and 25 µ Z-Media® (synthetic)
Phosphate Esters	All Z-Media® (synthetic) with H (EPR) seal designation

### Fluid Compatibility

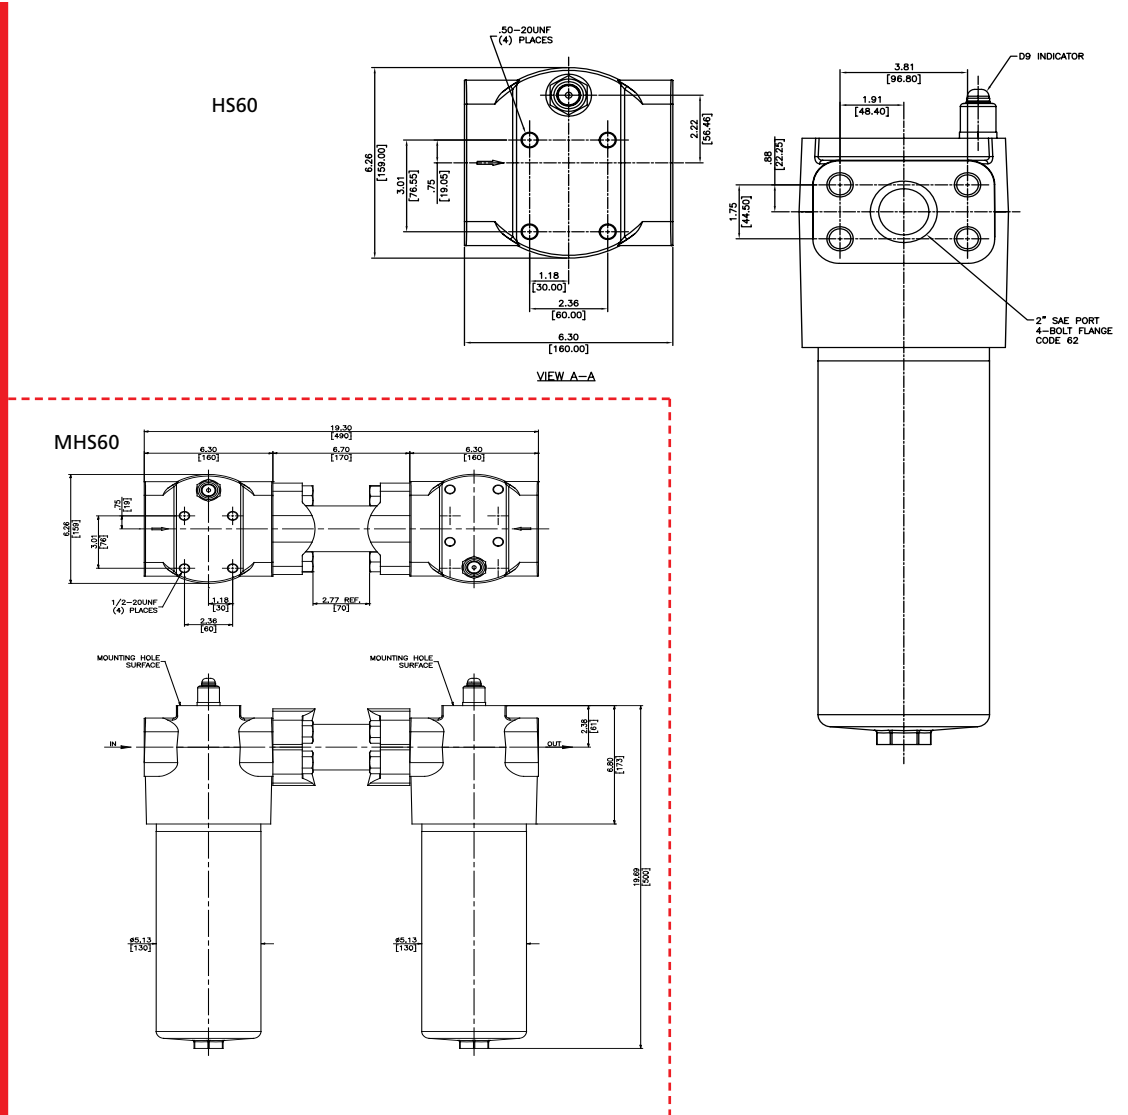

Metric dimensions in ( ).  
 Dimensions shown are inches (millimeters) for general information and overall envelope size only.  
 For complete dimensions please contact Schroeder Industries to request a certified print.

### Element Performance Information & Dirt Holding Capacity

Element	Filtration Ratio Per ISO 4572/NFPA T3.10.8.8 Using automated particle counter (APC) calibrated per ISO 4402			Filtration Ratio per ISO 16889 Using APC calibrated per ISO 11171	
	$\beta_x \geq 75$	$\beta_x \geq 100$	$\beta_x \geq 200$	$\beta_{x(c)} \geq 200$	$\beta_{x(c)} \geq 1000$
13HZ3/13HZX3	<1.0	<1.0	<2.0	<4.0	4.8
13HZ5/13HZX5	2.5	3.0	4.0	4.8	6.3
13HZ10/13HZX10	7.4	8.2	10.0	8.0	10.0
13HZ25/13HZX25	18.0	20.0	22.5	19.0	24.0

Element	DHC (gm)	Element	DHC (gm)
13HZ3	100.7	13HZX3	75.7
13HZ5	113.2	13HZX5	74.1
13HZ10	119.7	13HZX10	81.4
13HZ25	123.5	13HZX25	92.9

Element Collapse Rating: 290 psi (20 bar) for standard elements  
 3045 psi (210 bar) for high collapse (ZX) versions

Flow Direction: Outside In


Element Nominal Dimensions: 13HZ : 3.5" (90 mm) O.D. x 13" (325 mm) long

# Top-Ported Pressure Filter

## HS60/ MHS60

$\Delta P_{\text{housing}}$


HS60/MHS60  $\Delta P_{\text{housing}}$  for fluids with sp gr (specific gravity) = 0.86:

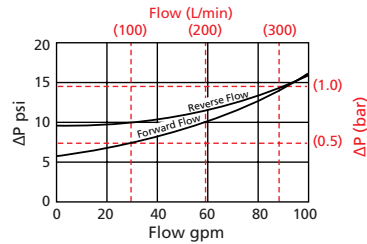

$\Delta P_{\text{element}}$

13HZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

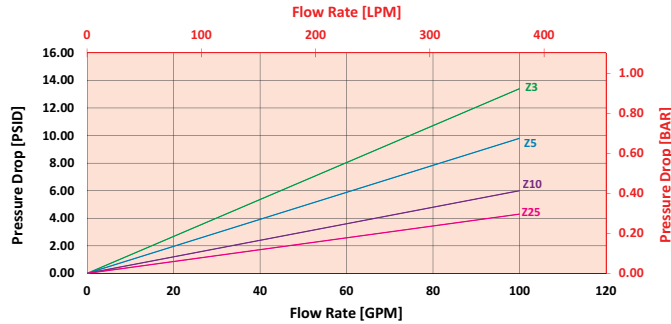

Pressure  
Drop  
Information  
Based on  
Flow Rate  
and Viscosity

$$\Delta P_{\text{filter}} = \Delta P_{\text{housing}} + (\Delta P_{\text{element}} * V_f)$$

### Exercise:

Determine  $\Delta P_{\text{filter}}$  at 30 gpm (113.7 L/min) for HS6013HZ10S24D13 using 160 SUS (34 cSt) fluid.

Use the housing pressure curve to determine  $\Delta P_{\text{housing}}$  at 30 gpm. In this case,  $\Delta P_{\text{housing}}$  is 7 psi (.48 bar) on the graph for the HS60 housing.

Use the element pressure curve to determine  $\Delta P_{\text{element}}$  at 30 gpm. In this case,  $\Delta P_{\text{element}}$  is 2 psi (.14 bar) according to the graph for the 13HZ10 element.

Because the viscosity in this sample is 160 SUS (34 cSt), we determine the **Viscosity Factor ( $V_f$ )** by dividing the **Operating Fluid Viscosity** with the **Standard Viscosity** of 150 SUS (32 cSt). To best determine your Operating Fluid Viscosity, please reference the chart in Appendix D.

Finally, the overall filter pressure differential,  $\Delta P_{\text{filter}}$ , is calculated by adding  $\Delta P_{\text{housing}}$  with the true element pressure differential, ( $\Delta P_{\text{element}} * V_f$ ). The  $\Delta P_{\text{element}}$  from the graph has to be multiplied by the viscosity factor to get the true pressure differential across the element.

### Solution:

$$\Delta P_{\text{housing}} = 7 \text{ psi } [.48 \text{ bar}] \quad | \quad \Delta P_{\text{element}} = 2 \text{ psi } [.14 \text{ bar}]$$

$$V_f = 160 \text{ SUS } (34 \text{ cSt}) / 150 \text{ SUS } (32 \text{ cSt}) = 1.1$$

$$\Delta P_{\text{filter}} = 7 \text{ psi } + (2 \text{ psi } * 1.1) = 9.2 \text{ psi}$$

OR

$$\Delta P_{\text{filter}} = .48 \text{ bar } + (.14 \text{ bar } * 1.1) = .63 \text{ bar}$$

Note:


If your element is not graphed, use the following equation:

$\Delta P_{\text{element}} = \text{Flow Rate} \times \Delta P_f$ . Plug this variable into the overall pressure drop equation.


Ele.	$\Delta P$
13HZX3	0.176
13HZX5	0.104
13HZX10	0.054
13HZX25	0.048

## Filter Model Number Selection

### How to Build a Valid Model Number for a Schroeder HS60:



Example: NOTE: One option per box



BOX 1	BOX 2	BOX 3
<b>Filter Series</b>  <b>HS60</b>  <b>HSN60</b> <small>(Non-bypassing: requires ZX high collapse elements)</small>  <b>MHS60</b>  <b>MHSN60</b> <small>(Non-bypassing: requires ZX high collapse elements)</small>	<b>Element Part Number</b>  13HZ3 = 3 µm Excellement® Z-Media® (synthetic) 13HZ5 = 5 µm Excellement® Z-Media® (synthetic) 13HZ10 = 10 µm Excellement® Z-Media® (synthetic) 13HZ25 = 25 µm Excellement® Z-Media® (synthetic) 13HZX3 = 3 µm Excellement® Z-Media® (high collapse center tube) 13HZX5 = 5 µm Excellement® Z-Media® (high collapse center tube) 13HZX10 = 10 µm Excellement® Z-Media® (high collapse center tube) 13HZX25 = 25 µm Excellement® Z-Media® (high collapse center tube)	<b>Seal Material</b>  Omit = Buna N V = Viton® H = EPR

BOX 4	BOX 5																																		
<b>Porting Options</b>  S24 = SAE-24  F24 = 1½" SAE 4-bolt flange Code 62  F32 = 2" SAE 4-bolt flange Code 62	<b>Dirt Alarm® Options</b>  <table border="1"> <tr> <td>None</td> <td>Omit = None</td> </tr> <tr> <td>Visual</td> <td>D13 = Visual pop-up</td> </tr> <tr> <td rowspan="10">Electrical</td> <td>MS5SS = Electrical w/ 12 in. 18 gauge 4-conductor cable</td> </tr> <tr> <td>MS5SSLC = Low current MS5</td> </tr> <tr> <td>MS10SS = Electrical w/ DIN connector (male end only)</td> </tr> <tr> <td>MS10SSLC = Low current MS10</td> </tr> <tr> <td>MS11SS = Electrical w/ 12 ft. 4-conductor wire</td> </tr> <tr> <td>MS12SS = Electrical w/ 5 pin Brad Harrison connector (male end only)</td> </tr> <tr> <td>MS12SSLC = Low current MS12</td> </tr> <tr> <td>MS16SS = Electrical w/ weather-packed sealed connector</td> </tr> <tr> <td>MS16SSLC = Low current MS16</td> </tr> <tr> <td>MS17SSLC = Electrical w/ 4 pin Brad Harrison male connector</td> </tr> <tr> <td rowspan="7">Electrical with Thermal Lockout</td> <td>MS5SST = MS5 (see above) w/ thermal lockout</td> </tr> <tr> <td>MS5SSLC = Low current MS5T</td> </tr> <tr> <td>MS10SST = MS10 (see above) w/ thermal lockout</td> </tr> <tr> <td>MS10SSLC = Low current MS10T</td> </tr> <tr> <td>MS12SST = MS12 (see above) w/ thermal lockout</td> </tr> <tr> <td>MS12SSLC = Low current MS12T</td> </tr> <tr> <td>MS16SST = MS16 (see above) w/ thermal lockout</td> </tr> <tr> <td>MS16SSLC = Low current MS16T</td> </tr> <tr> <td>MS17SSLC = Low current MS17T</td> </tr> <tr> <td rowspan="2">Electrical Visual</td> <td>MS13SS = Supplied w/ threaded connector &amp; light</td> </tr> <tr> <td>MS14SS = Supplied w/ 5 pin Brad Harrison connector &amp; light (male end)</td> </tr> <tr> <td rowspan="3">Electrical Visual with Thermal Lockout</td> <td>MS13SSDCT = MS13 (see above), direct current, w/ thermal lockout</td> </tr> <tr> <td>MS13SSDCLCT = Low current MS13DCT</td> </tr> <tr> <td>MS14SSDCT = MS14 (see above), direct current, w/ thermal lockout</td> </tr> <tr> <td></td> <td>MS14SSDCLCT = Low current MS14DCT</td> </tr> </table>	None	Omit = None	Visual	D13 = Visual pop-up	Electrical	MS5SS = Electrical w/ 12 in. 18 gauge 4-conductor cable	MS5SSLC = Low current MS5	MS10SS = Electrical w/ DIN connector (male end only)	MS10SSLC = Low current MS10	MS11SS = Electrical w/ 12 ft. 4-conductor wire	MS12SS = Electrical w/ 5 pin Brad Harrison connector (male end only)	MS12SSLC = Low current MS12	MS16SS = Electrical w/ weather-packed sealed connector	MS16SSLC = Low current MS16	MS17SSLC = Electrical w/ 4 pin Brad Harrison male connector	Electrical with Thermal Lockout	MS5SST = MS5 (see above) w/ thermal lockout	MS5SSLC = Low current MS5T	MS10SST = MS10 (see above) w/ thermal lockout	MS10SSLC = Low current MS10T	MS12SST = MS12 (see above) w/ thermal lockout	MS12SSLC = Low current MS12T	MS16SST = MS16 (see above) w/ thermal lockout	MS16SSLC = Low current MS16T	MS17SSLC = Low current MS17T	Electrical Visual	MS13SS = Supplied w/ threaded connector & light	MS14SS = Supplied w/ 5 pin Brad Harrison connector & light (male end)	Electrical Visual with Thermal Lockout	MS13SSDCT = MS13 (see above), direct current, w/ thermal lockout	MS13SSDCLCT = Low current MS13DCT	MS14SSDCT = MS14 (see above), direct current, w/ thermal lockout		MS14SSDCLCT = Low current MS14DCT
None	Omit = None																																		
Visual	D13 = Visual pop-up																																		
Electrical	MS5SS = Electrical w/ 12 in. 18 gauge 4-conductor cable																																		
	MS5SSLC = Low current MS5																																		
	MS10SS = Electrical w/ DIN connector (male end only)																																		
	MS10SSLC = Low current MS10																																		
	MS11SS = Electrical w/ 12 ft. 4-conductor wire																																		
	MS12SS = Electrical w/ 5 pin Brad Harrison connector (male end only)																																		
	MS12SSLC = Low current MS12																																		
	MS16SS = Electrical w/ weather-packed sealed connector																																		
	MS16SSLC = Low current MS16																																		
	MS17SSLC = Electrical w/ 4 pin Brad Harrison male connector																																		
Electrical with Thermal Lockout	MS5SST = MS5 (see above) w/ thermal lockout																																		
	MS5SSLC = Low current MS5T																																		
	MS10SST = MS10 (see above) w/ thermal lockout																																		
	MS10SSLC = Low current MS10T																																		
	MS12SST = MS12 (see above) w/ thermal lockout																																		
	MS12SSLC = Low current MS12T																																		
	MS16SST = MS16 (see above) w/ thermal lockout																																		
MS16SSLC = Low current MS16T																																			
MS17SSLC = Low current MS17T																																			
Electrical Visual	MS13SS = Supplied w/ threaded connector & light																																		
	MS14SS = Supplied w/ 5 pin Brad Harrison connector & light (male end)																																		
Electrical Visual with Thermal Lockout	MS13SSDCT = MS13 (see above), direct current, w/ thermal lockout																																		
	MS13SSDCLCT = Low current MS13DCT																																		
	MS14SSDCT = MS14 (see above), direct current, w/ thermal lockout																																		
	MS14SSDCLCT = Low current MS14DCT																																		

#### NOTES:

- Box 2. Replacement element part numbers are identical to contents of Boxes 2 and 3.
- Box 3. Viton® is a registered trademark of DuPont Dow Elastomers.
- Box 5. All Dirt Alarm® Indicators must be Stainless Steel. Standard indicator setting is 75 psi. For replacement indicators, contact the factory.