



In-Line Bulk Fuel Coalescing Filter

*Coalescing Elements Patent-Pending

16 gpm
60 L/min

150 psi
10 bar

Applications



POINT OF USE FUEL DISPENSING



FLEET FILL / BULK FUEL TRANSFER



BULK FUEL UNLOADING



PROTECTION FOR HIGH-FLOW FUEL INJECTION SYSTEMS



BULK TANK KIDNEY LOOP / RECIRCULATION

Features and Benefits

- Patent-pending, three-phase, particulate and fuel/water separation media technology
- A revolutionary element designed for the highest single-pass water and particulate removal efficiencies in today's ultra-low sulfur diesel (ULSD) fluids
- Protects expensive Tier III and Tier IV engine components against failures caused by particulate and water transferred from bulk fuel tanks to the vehicle
- Allows users to achieve or exceed the particulate and water removal specifications of the injection system OEMs
- Previously acceptable industry standard products no longer provide the high-efficiency separation needed in today's ULSD fluids
- Housing design allows for field upgrade of any available option
- Schroeder Anti-Static Pleat® Media (ASP) is standard for all coalescing elements
- Pressure bypass indicator setting at 36 psi, with bypass valve cracking at 40 psi, allows for early indication before bypass of filter for advanced maintenance notice
- In applications >32°F (0°C) complete automation is achievable with fail-safe auto-drain feature using a remote 5 gallon (18L) or 20 gallon (75L) sump with alarm and auto shutdown
- Now available as a UL Certified, marine specific, fuel filter (ICFM)



Model no. of filter in photograph is: ICFV516LEP



Model no. of filter in photograph is: ICFM

Markets



INDUSTRIAL



MOBILE VEHICLES



MARINE



MINING TECHNOLOGY



AGRICULTURE



POWER GENERATION



COMMON RAIL INJECTOR SYSTEMS



FLEET



RAILROAD



BULK FUEL FILTRATION


In-Line Bulk Fuel Coalescing Filter

*Coalescing Elements Patent-Pending



Flow Rating:	Up to 16 gpm (60 L/min) for ULSD15
Inlet/Outlet Connection:	1 1/2" NPTF Standard, -16 (ORB) SAE J1926 Optional
Max. Operating Pressure:	150 psi (10 bar)
Min. Yield Pressure:	450 psi (31 bar)
Rated Fatigue Pressure:	90 psi (6 bar), per NFPA T2.6.1-2005
Temp. Range:	32°F to 165°F (0°C to 74°C) standard and AWD option -20°F to 165°F (-29°C to 74°C) H option
Bypass Indication:	36 psi (2.5 bar) (Lower indication options available)
Bypass Valve Cracking:	40 psi (2.8 bar)
Porting Head/Cap:	Aluminum - Coating Option see Box 7
Element Bowl:	Steel - Epoxy Paint w/ High-phos Electroless Nickel Plating (Standard)
Filter Housing Weight:	15 lbs (6.8 kg) - Base unit without options or element
Element Change Clearance:	Access from top (remove cap) - 18" (457.2 mm) Access from below (remove bowl) - 2.5" (63.5 mm)
Housing Sump:	32 oz. (0.95 L)
Optional:	External water sump and non-immersion heater (power 120VAC, 235W), Sight glass, bracket, water in fuel sensor w/ or w/out remote mount light and 6' lead

Note: For other electrical options, contact factory
Element sold separately

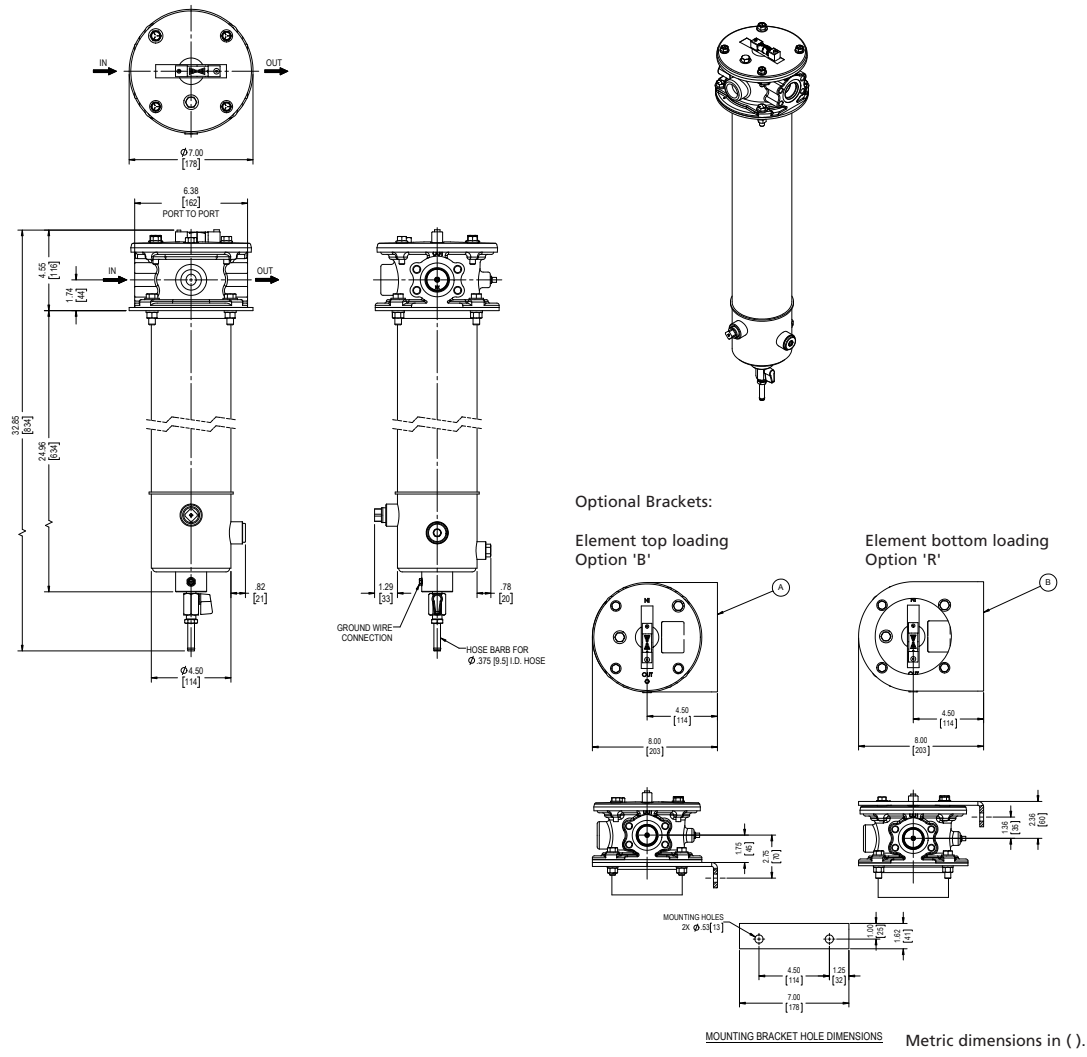

Filter Housing Specifications

- ICF
- BDF
- BDA
- GHPF
- GHCF
- QCF
- BDS
- BDS2
- BDS3
- BDS4
- LVH-F
- LVH-C
- BDFC
- BDFP
- BDC
- HDP
- HDPD
- BCC




In-Line Bulk Fuel Coalescing Filter

*Coalescing Elements Patent-Pending

Pressure Drop Information Based on Flow Rate and Viscosity

$\Delta P_{\text{housing}}$

ICF $\Delta P_{\text{housing}}$ for fluids with sp gr= 0.86

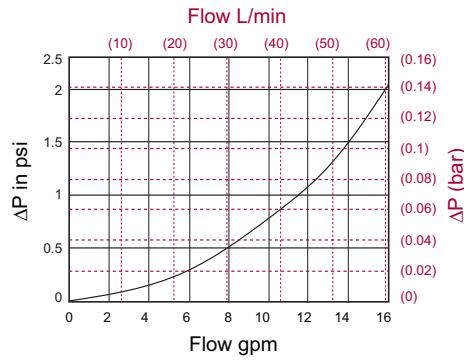

sp gr = specific gravity

Notes

$\Delta P_{\text{element}}$

$\Delta P_{\text{element}} = \text{flow} \times \text{element } \Delta P \text{ factor} \times \text{viscosity factor}$

El. ΔP factors @ 37 SUS (3 cSt).

C184Z3V = 0.2

C184Z5V = 0.2

C184Z7VE = 0.09

If working in units of bars & L/min, divide above factor by 54.9.

Viscosity factor: Divide viscosity by 37 SUS (3 cSt).

$\Delta P_{\text{filter}} = \Delta P_{\text{housing}} + \Delta P_{\text{element}}$

Exercise: Determine ΔP at 16 gpm (60 L/min) for ICFVP24LEP

Solution:

$\Delta P_{\text{housing}} = 2.05 \text{ psi} = [0.14 \text{ bar}]$

$\Delta P_{\text{coalescing element}} = 16 \times 0.2 = 3.2 \text{ psi} [0.22 \text{ bar}]$

$\Delta P_{\text{total}} = 2.05 + 3.2 = 5.25 \text{ psi} [0.36 \text{ bar}]$

Filter Element Selection Coalescing Element Performance Information
Elements Sold Separately

Coalescing Element	Pressure Side Coalescing	
	Recommended Flow	Single Pass Water Removal Efficiency
C184Z5V	16 gpm	≥ 99.5%
C184Z3V	16 gpm	≥ 99.5%
C184Z7VE	16 gpm	Contact Factory for Element Data

Flow Direction: Inside Out

Element Nominal Dimensions: 4.0" (102 mm) O.D. x 18.5" (470 mm) long



*Schroeder Anti-Static Pleat Media (ASP®) is standard

*NOTE: Efficiency based on ULSD15 with 27 Dynes/cm surface tension and 0.25% (2500 ppm) water injection. Discharge water concentration of <100 ppm free and emulsified water.

Highlighted product eligible for **QuickDelivery**

In-Line Fuel Coalescing Filter

*Coalescing Elements Patent-Pending

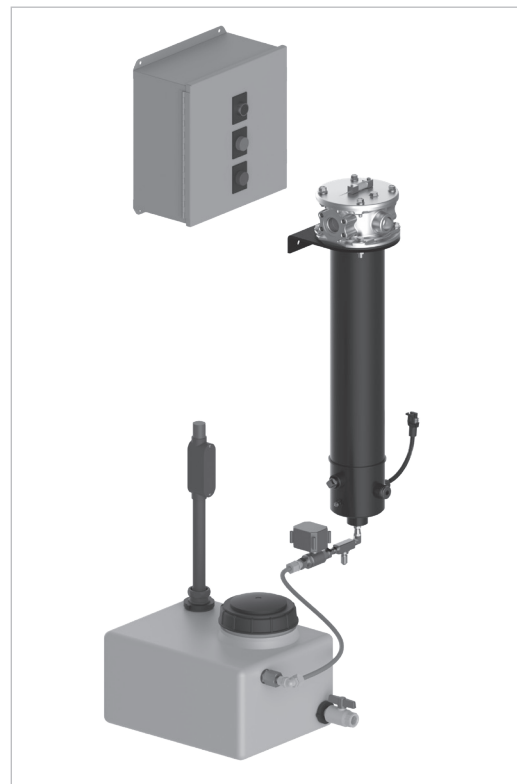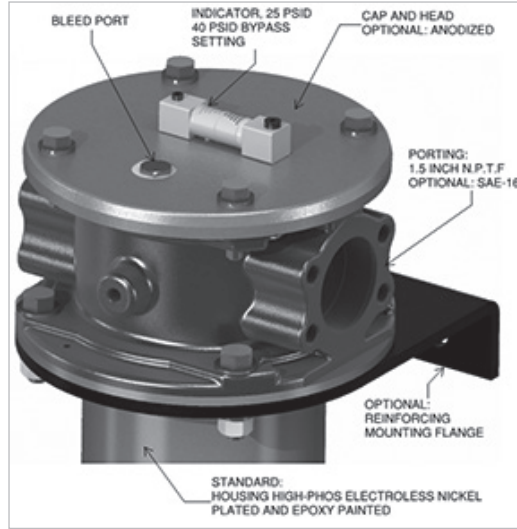

NOTES: Water in fuel sensor (WIF) supplied w/ or w/out remote mount indicator light to show full filter housing sump
 T Option = WIF sensor only w/out filter housing sump full indication light or control panel
 I Option = WIF sensor w/ remote mount filter housing sump full indicator light and NEMA 4X control panel supplied

NOTES: Filter Sump Heater Control Panel dimension:
 6.5" W x 5.5" H x 6.5" D
 (165 W x 140 H x 165 D)
 Automatic Water Drain Control Panel dimension:
 10" W x 8" H x 12" D
 (254 W x 203.20 H x 304.80 D)
 *For use above 32°F (0°C) only
 Electrical cable length (Control Panel to ICF): 4 ft. (1.22m)
 Hose length for Automatic Water Drain feature (ICF to Tank): 6 ft.(1.83m)
 All control panels "NEMA 4X" rated

Metric dimensions in ().

NOTES: Remote Tank dimension:
 5 Gallon Tank: 22" W x 9.25" L x 7.125" H
 (558.80 W x 234.95 L x 180.97 H)
 20 Gallon Tank: 15" W x 11" L x 31" H
 (381 W x 279.40 L x 787.40 H)
 Power supply for tank high level LED light: 9 VDC (battery included) Supplied w/ 9 VDC terminal for customer wiring provided.

Metric dimensions in ().

ICF Options

Filter Cap Assembly **BDF**
BDA

GHPF

GHCF

QCF

BDS

BDS2

BDS3

Available Options **BDS4**

LVH-F

LVH-C

BDFC

BDFP

Panel & Control for Automatic Drain with Safety Features **BDC**
HDP
HDPD
BCC


Shown w/ Automatic Sump (Manual Remote Sump is Optional but tank is the same)




In-Line Fuel Coalescing Filter

*Coalescing Elements Patent-Pending

How to Build a Valid Model Number for a Schroeder ICF without element:



Example: NOTE:



Highlighted product eligible for QuickDelivery

BOX 1	BOX 2	BOX 3	BOX 4
Filter Series	Sealing Material	Porting	Coalescing Element Change Indicator
ICF	V = Viton®	P24 = 1½" NPTF (standard) S16 = -16 (ORB) SAE J1926	L = In cap bar indicator

BOX 5	BOX 6	BOX 7
Mounting Option	Filter Housing Sump Level Indicator Option	Coating Option
B = Bracket (Element top loading) R = Bracket (Element bottom loading) Omit = None	S = Sight Glass I = Water In Fuel sensor w/ remote mount light indicator and 6' lead for use in factory supplied control panel T = Water In Fuel sensor w/out remote light for use in customer supplied control panel Omit = None	EP = Epoxy paint and plating (standard) A = Anodized cap & head (optional)

BOX 8	BOX 9	BOX 10
Heating Option	Automatic Drain & Remote Sump Options	Optional Manual Drain Remote Sump
H = Filter Sump Heater Omit = None	AWD5 = Auto water drain 5 gal tank w/ failsafe (only offered for applications above 32°F (0°C) and units ordered without heater) AWD20 = Auto water drain 20 gal tank w/ failsafe (only offered for applications above 32°F (0°C) and units ordered without heater) Omit = None	S5 = 5gal sump tank S20 = 20gal sump tank Omit = None

NOTES:

For details on how to order the UL Listed ICFM, Contact Factory

Unless automatic drain option is specified, ICF units will come standard with manual drain

Coalescing element sold separately and selected below

If ordering the collection of options (Box 5. B, Box 6. S, and Box 8. H) together, please contact factory

Box 2. Viton® is a registered trademark of DuPont Dow Elastomers

Box 6 and 7. Only two boxes that allow combination of options (S + I or EP + A)

Box 8. Filter sump heater option only available when ordered w/out automatic water drain (AWD5 or AWD20)

Box 9. AWD fail safe is shown on page 25 (ICF)

Element Part Number	Pressure Side Coalescing	
	Max Flow	Single Pass Water Removal Efficiency
C184Z5V	16 gpm	≥ 99.5%
C184Z3V	16 gpm	≥ 99.5%
C184Z7VE	16 gpm	Contact Factory for Element Data

NOTE: Efficiency based on ULSD15 with 27 Dynes/cm surface tension and 0.25% (2500 ppm) water injection. Discharge water concentration of <100 ppm free and emulsified water.

Flow Direction: Inside Out

Element Nominal Dimensions: 4.0" (102 mm) O.D. x 18.5" (470 mm) long

*Schroeder Anti-Static Pleat Media (ASP®) is standard

Fuel Oils

- ULSD15, low sulfur diesel and high sulfur diesel
- Biodiesel blends
- Synthetic diesel and blends
- No. 2 fuel oil and heating oil

Element Part Number Selection

Highlighted product eligible for QuickDelivery

Fluid Compatibility