

**MFS
MFD**

Mobile Filtration Systems

U.S. Patents 6568919 7604738

7 or 14 gpm
26.5 or 53 L/min



Features and Benefits

- Single, double and triple bowl length option allows the flexibility of additional dirt-holding capacity
- Modular base eliminates hoses between components and minimizes leakage
- Base-ported filter provides easy element service from the top cap
- D5 Dirt Alarm® indicates when filter element needs changed
- Integral suction strainer protects pump
- Hoses and connection tubes included (13' total length)
- Option for the addition of Contamination Sensors and WLAN/LAN Communication (CSI-C-11)
- Usable with FluMoS Mobile App - HY-TRAX® option only



Description

The Schroeder Mobile Filtration System is a compact, self-contained filtration system equipped with high efficiency, high capacity elements capable of removing particulate contamination and/or water quickly, conveniently and economically. It is perfect for cleaning up existing systems as well as for prefiltering new fluids, since new fluids often have contamination levels significantly higher than that recommended for most hydraulic systems.

The MFS single filtration unit can remove either water or particulate contamination. The MFD dual filtration unit can be used to remove both water and particulate contamination, or for staged particulate contaminant removal.

Contamination Sensor for Remote Visibility Options

HY-TRAX® manual fluid sampling system: Schroeder now offers the HY-TRAX® manual fluid sampling system as an additional option allowing for real-time fluid condition monitoring. ISO particle counts are visually displayed on the TCM. Users will now know when they have reached their desired ISO contamination levels. For more information, please see [page 42 - link to Retrofit Pages \(TBD\)](#).

CSI-C-11: Schroeder also offers the CSI-C-11 Communication Interface for WLAN or LAN transmission of data and data storage capabilities. For more information, please see page 38.

Applications

- Supplementing continuous filtration by system filters
- Cleaning up a hydraulic system following component replacement
- Filtering new fluid before it is put into service
- Transferring fluid from storage tanks and drums to system reservoirs

Specifications

Flow Rating:	7 gpm (26.5 L/min) max or 14 gpm (53.0 L/min) max
Viscosity Range:	40 - 1,000 SUS (4 - 216 cSt) Higher viscosity version available. Contact factory for details.
Hose Pressure Rating:	30 psig (2.0 bar) @ 150°F (65.6°C) Full vacuum @ 150°F (65.6°C)
Fluid Temperature:	25°F to 150°F (-4°C to 65°C)
Bypass Valve Setting:	Cracking: 30 psi (2 bar)
Material:	Manifold and cap: Cast aluminum Element case: Steel
Compatibility:	All petroleum based hydraulic fluid. Contact factory for use with other fluids.
Motor:	115 VAC Single phase 3/4 hp (7 gpm) or 1-1/2 hp (14 gpm)
Element Change Clearance:	8.50" (215 mm) 1K (9, 18 or 27" depending on model configuration)

Weights

gpm	MFS-1K lb (kg)	MFS-2K lb (kg)	MFS-3K lb (kg)	MFD-1K lb (kg)	MFD-2K lb (kg)	MFD-3K lb (kg)
7	170 (77)	180 (82)	190 (86)	185 (84)	203 (92)	220 (100)
14	170 (80)	187 (85)	197 (89)	192 (87)	210 (95)	227 (103)

**CSI-C-11
Compatible
Product**



Mobile Filtration Systems

U.S. Patents 6568919 7604738





TCM
TCM-FC
HY-TRAX®
RBSA
TIM
TSU
TMU
FCU 1000 Series
TPM
TMS
TWS-C/D
SMU
CTU
EPK
Trouble
Check Plus
HMG2500
HMG4000
ET-100-6
HTB
RFSA
HFS-BC
MFD-BC
MFS, MFD
MFD-MV
MFS-HV
AMS, AMD
FS
AMFS
KLS, KLD
AKS, AKD
LSN, LSA, LSW
X Series
KLC
MTS
OLF-P
NxTM
IXU
Triton-A
Triton-E
SVD01
SVD
OX5
Appendix

MFS

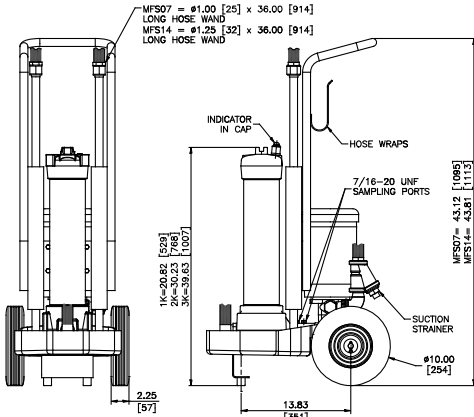


MFD

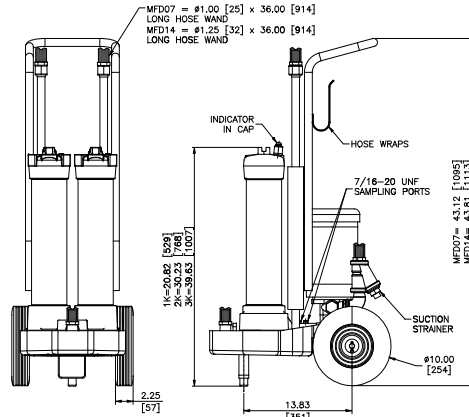


Metric dimensions in ().

How to Build a Valid Model Number for a Schroeder MFS:



Example: NOTE: One option per box



Model	No. of Elements	Element Length	Element Media First Filter
MFS	1	09	Z01 = 1 µm Excel-ZPlus® Z-Media® (synthetic) Z03 = 3 µm Excel-ZPlus® Z-Media® (synthetic) Z05 = 5 µm Excel-ZPlus® Z-Media® (synthetic) Z10 = 10 µm Excel-ZPlus® Z-Media® (synthetic) Z25 = 25 µm Excel-ZPlus® Z-Media® (synthetic) EWR = Water Removal
MFD	3	27	G03 = 3 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G05 = 5 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G10 = 10 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G25 = 25 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® GWR = Water Removal w/GeoSeal®

BOX 5	BOX 6	BOX 7
Element Media Second Filter (MFD Only) Z01 = 1 µm Excel-ZPlus® Z-Media® (synthetic) Z03 = 3 µm Excel-ZPlus® Z-Media® (synthetic) Z05 = 5 µm Excel-ZPlus® Z-Media® (synthetic) Z10 = 10 µm Excel-ZPlus® Z-Media® (synthetic) Z25 = 25 µm Excel-ZPlus® Z-Media® (synthetic) G03 = 3 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G05 = 5 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G10 = 10 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® G25 = 25 µm Excel-ZPlus® Z-Media® (synthetic) w/GeoSeal® GWR = Water Removal w/GeoSeal®	Seal Material B = Buna V = Viton® H.5 = Skydrol Compatibility	Voltage Omit = 115 V / 60 Hz / 1-Phase A = 230 V / 60 Hz / 3-Phase B = 460 V / 60 Hz / 3-Phase C = 220 V / 50 Hz / 1-Phase D = 230 V / 60 Hz / 1-Phase
	BOX 8 Pump Size (gpm) 07 14	BOX 9 Particle Counter P = Particle Counter Omit = Without Particle Counter
BOX 10 Communication CSI = CSI-C-11 Option	BOX 11 Communication with Water Sensor CSI-W = CSI-C-11 with TWS-C Option	

Model Number Selection

NOTES:

Box 2. When Box 2 is 2 or 3, Box 3 must be 09.

Box 5. If MFD is ordered, the quantity, length, and seals will be identical for both filter housings.

Box 6. H.5 seal designation may be used with 3, 5, 10, and 25µ Z (synthetic) and calls for EPR seals, stainless steel wire mesh in element(s) and Imron® epoxy coated enclosures on cart. H.5 not available with 7 gpm pump. Imron® is a registered trademark of DuPont.

Box 7. 230 & 460 Volt, 60 Hz options supplied with starters. 230 Volt, 50 Hz units will have plug cut-off from power cord and include no starters, flow ratings reduced to ~5-gpm and 11-gpm. Contact factory for high viscosity version.

Box 9. Particle counter option only available on 115VAC 60 hertz carts. Particle counter is not available with Skydrol fluids.

For replacement element part numbers, please see "Appendix Section - Replacement Elements" of this catalog.