




SAME DAY SHIPMENT MODEL AVAILABLE!

Air Breathers

Air Breathers

Features and Benefits

- Durable synthetic Nylon 6 housing
- Phenolic resin impregnated filter element
- Standard Buna N O-Ring
- Available with anti-splash or relief valve
- Optional customer logo (contact factory)
- Optional dipstick (contact factory)

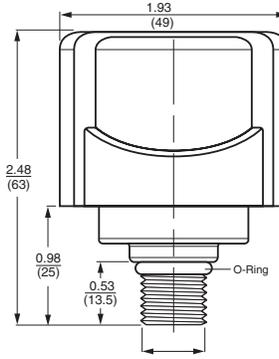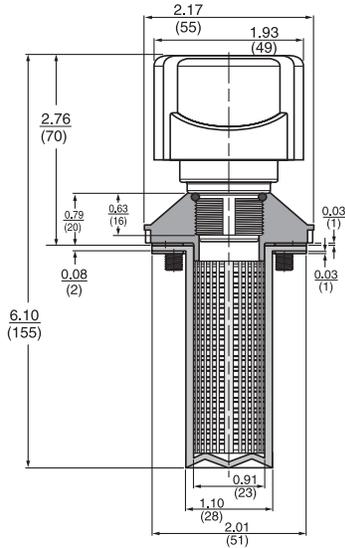

PAB1 Breather



Suction Separators and Strainers

Oil Sight Glasses

PABS1 Breather




Max. Flow Rate: 7 SCFM / 51 gpm at .15 psi
13 SCFM / 100 gpm at .6 psi

Filtration Rating: 3 μm absolute


Operational Temperature: -22° to 212°F (-30° to 100°C)

Specifications

How to Build a Valid Model Number for a Schroeder PAB1:



Example: NOTE: One option per box



Filter Model Number Selection

Same Day Shipment Model

BOX 1	BOX 2	BOX 3	BOX 4	BOX 5	BOX 6
Model Number	Replacement Element	Connection Type	Filtration Rating	Gauge Option	Connection Size
PAB1	Omit	P = NPT	3	N = No Gauge	.5 = 1/2" NPT
PABS1		S = SAE			12 = 3/4" SAE
		— For PABS1 Only —			— For PABS1 Only —
		F = Flanged			1 = Standard
BOX 7					
Options					
AS = Anti-Splash					
R6 = 6 psi relief valve					
— For PAB1 Only —					
D = Dipstick					
— For PABS1 Only —					
Replacement Elements: PAB1M3N22					

NOTE:

Contact factory for lead time and minimum order quantity for other models.