

# Top-Ported Pressure Filter

# PF40



### Features and Benefits

- Top-ported pressure filter
- All steel housing offers unparalleled fatigue rating
- Available with non-bypass option with high collapse element
- Two bowl lengths provide optimal sizing for the application
- Offered in conventional sub-plate, SAE straight thread, and ISO 228 porting

**50 gpm**  
**190 L/min**  
**4000 psi**  
**275 bar**

Model No. of filter in photograph is PF409HZ10S.


- NF30
- NFS30
- YF30
- CFX30
- PLD
- CF40
- DF40
- PF40**
- RFS50
- RF60
- CF60
- CTF60
- VF60
- LW60
- KF30
- KF50
- TF50
- KC50
- MKF50
- MKC50
- KC65
- HS60
- MHS60
- KFH50
- LC60
- LC35
- LC50
- NOF30-05
- NOF-50-760
- FOF60-03
- NMF30
- RMF60
- 14-CRZX10
- 20-CRZX10

Flow Rating:	Up to 50 gpm (190 L/min) for 150 SUS (32 cSt) fluids
Max. Operating Pressure:	4000 psi (275 bar)
Min. Yield Pressure:	12,000 psi (828 bar), per NFPA T2.6.1
Rated Fatigue Pressure:	2500 psi (173 bar), per NFPA T2.6.1-R1-2005
Temp. Range:	-20°F to 225°F (-29°C to 107°C)
Bypass Setting:	Cracking: 40 psi (2.8 bar) Full Flow: 75 psi (5.2 bar)
Porting Head:	Steel
Element Case:	Steel
Weight of PF40-5H:	21.8 lbs. (9.9 kg)
Weight of PF40-9H:	25.5 lbs. (11.6 kg)
Element Change Clearance:	3.25" (83 mm)

### Filter Housing Specifications

Type Fluid	Appropriate Schroeder Media
Petroleum Based Fluids	All E Media (cellulose) and Z-Media® (synthetic)
High Water Content	All Z-Media® (synthetic)
Invert Emulsions	10 and 25 μ Z-Media® (synthetic)
Water Glycols	3, 5, 10 and 25 μ Z-Media® (synthetic)
Phosphate Esters	All Z-Media® (synthetic) with H (EPR) seal designation

### Fluid Compatibility

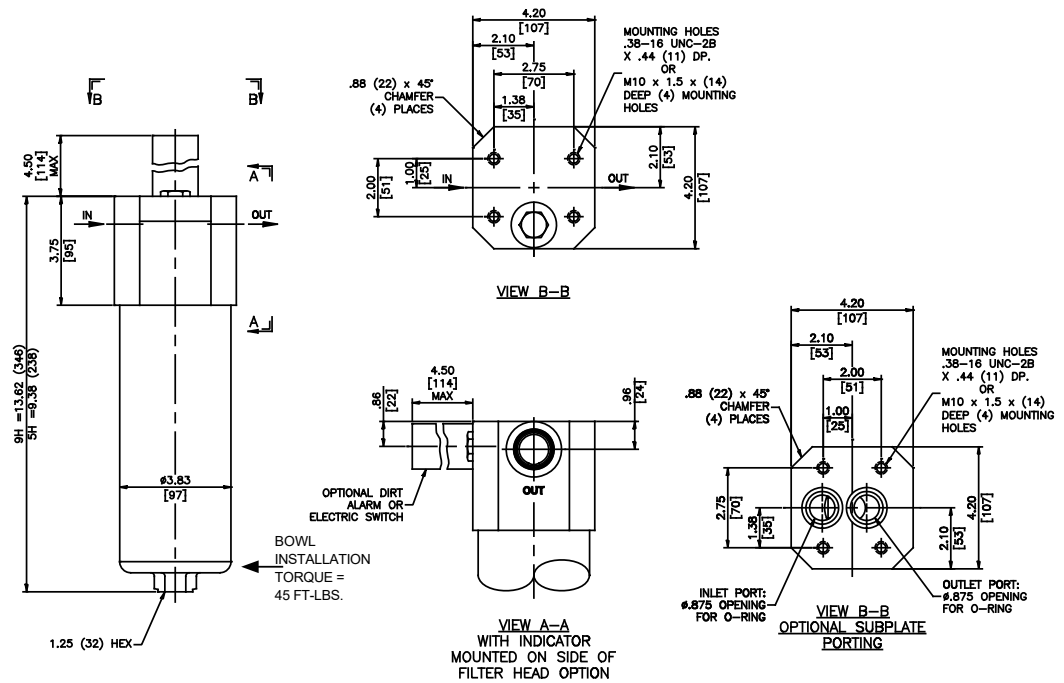

Metric dimensions in ( ).  
 Dimensions shown are inches (millimeters) for general information and overall envelope size only.  
 For complete dimensions please contact Schroeder Industries to request a certified print.

## Element Performance Information & Dirt Holding Capacity

Element	Filtration Ratio Per ISO 4572/NFPA T3.10.8.8 Using automated particle counter (APC) calibrated per ISO 4402			Filtration Ratio per ISO 16889 Using APC calibrated per ISO 11171	
	$\beta_x \geq 75$	$\beta_x \geq 100$	$\beta_x \geq 200$	$\beta_x(c) \geq 200$	$\beta_x(c) \geq 1000$
5HZ1/9HZ1	<1.0	<1.0	<1.0	<4.0	4.2
5HZ3/9HZ3	<1.0	<1.0	<2.0	<1.0	4.8
5HZ5/9HZ5	2.5	3.0	4.0	4.8	6.3
5HZ10/9HZ10	7.4	8.2	10.0	8.0	10.0
5HZ25/9HZ25	18.0	20.0	22.5	19.0	24.0
5HZX1/9HZX1	<1.0	<1.0	<1.0	<4.0	4.2
5HZX3/9HZX3	<1.0	<1.0	<2.0	<1.0	4.8
5HZX5/9HZX5	2.5	3.0	4.0	4.8	6.3
5HZX10/9HZX10	7.4	8.2	10.0	8.0	10.0
5HZX25/9HZX25	18.0	20.0	22.5	19.0	24.0

Element	DHC (gm)	Element	DHC (gm)	Element	DHC (gm)	Element	DHC (gm)
5HZ1	26	9HZ1	51	5HZX1	14	9HZX1	29
5HZ3	28	9HZ3	42	5HZX3	14	9HZX3	29
5HZ5	39	9HZ5	59	5HZX5	15	9HZX5	31
5HZ10	31	9HZ10	47	5HZX10	15	9HZX10	31
5HZ25	32	9HZ25	48	5HZX25	16	9HZX25	33


Element Collapse Rating: 150 psid (10 bar) for standard elements  
 3000 psid (210 bar) for high collapse elements

Flow Direction: Outside In

Element Nominal Dimensions: 5H: 2.5" (100 mm) O.D. x 5.36" (136 mm) long  
 9H: 2.5" (100 mm) O.D. x 9.63" (244 mm) long

$\Delta P_{\text{housing}}$


PF40  $\Delta P_{\text{housing}}$  for fluids with sp gr (specific gravity) = 0.86:



$\Delta P_{\text{element}}$


5HZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

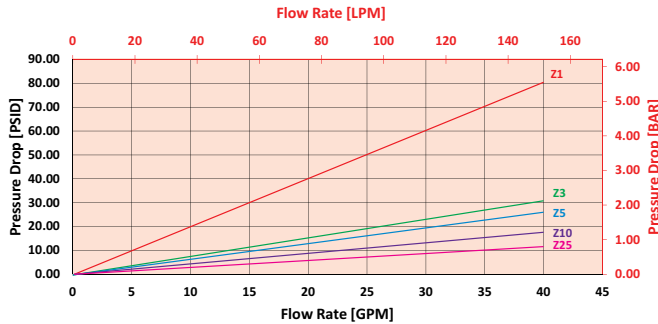

9HZ

Element Pressure Drop versus Flow Rate at 32 cSt (150 SUS)

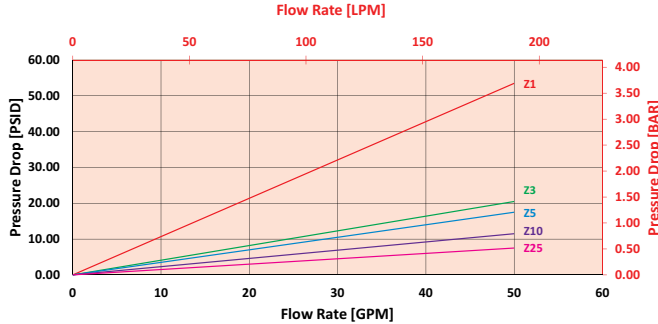

$$\Delta P_{\text{filter}} = \Delta P_{\text{housing}} + (\Delta P_{\text{element}} * V_f)$$

**Exercise:**

Determine  $\Delta P_{\text{filter}}$  at 20 gpm (75.7 L/min) for PF405HZ3SD5S using 160 SUS (34 cSt) fluid.

Use the housing pressure curve to determine  $\Delta P_{\text{housing}}$  at 20 gpm. In this case,  $\Delta P_{\text{housing}}$  is 2.5 psi (.17 bar) on the graph for the PF40 housing.

Use the element pressure curve to determine  $\Delta P_{\text{element}}$  at 20 gpm. In this case,  $\Delta P_{\text{element}}$  is 15 psi (1 bar) according to the graph for the 5HZ3 element.

Because the viscosity in this sample is 160 SUS (34 cSt), we determine the **Viscosity Factor ( $V_f$ )** by dividing the **Operating Fluid Viscosity** with the **Standard Viscosity** of 150 SUS (32 cSt). To best determine your Operating Fluid Viscosity, please reference the chart in Appendix D.

Finally, the overall filter pressure differential,  $\Delta P_{\text{filter}}$ , is calculated by adding  $\Delta P_{\text{housing}}$  with the true element pressure differential,  $(\Delta P_{\text{element}} * V_f)$ . The  $\Delta P_{\text{element}}$  from the graph has to be multiplied by the viscosity factor to get the true pressure differential across the element.

**Solution:**

$\Delta P_{\text{housing}} = 2.5 \text{ psi } [.17 \text{ bar}] \mid \Delta P_{\text{element}} = 15 \text{ psi } [1 \text{ bar}]$

$V_f = 160 \text{ SUS } (34 \text{ cSt}) / 150 \text{ SUS } (32 \text{ cSt}) = 1.1$

$\Delta P_{\text{filter}} = 2.5 \text{ psi} + (15 \text{ psi} * 1.1) = 19 \text{ psi}$

**OR**

$\Delta P_{\text{filter}} = .17 \text{ bar} + (1 \text{ bar} * 1.1) = 1.3 \text{ bar}$



**Pressure Drop Information Based on Flow Rate and Viscosity**

Note:  
If your element is not graphed, use the following equation:  
 $\Delta P_{\text{element}} = \text{Flow Rate} \times \Delta P_f$  Plug this variable into the overall pressure drop equation.

Ele.	$\Delta P$
5HZX3	1.17
5HZX10	0.50
5HZX25	0.27
9HZX3	0.62
9HZX10	0.26
9HZX25	0.14

## Filter Model Number Selection

### How to Build a Valid Model Number for a Schroeder PF40:



BOX 1	BOX 2	BOX 3
<b>Filter Series</b>	<b>Element Length (in)</b>	<b>Element Part Number</b>
PF40	5	HZ1 = H size 1 μ Excellement® Z-Media® (synthetic) HZ3 = H size 3 μ Excellement® Z-Media® (synthetic) HZ5 = H size 5 μ Excellement® Z-Media® (synthetic) HZ10 = H size 10 μ Excellement® Z-Media® (synthetic) HZ25 = H size 25 μ Excellement® Z-Media® (synthetic) HZX3 = H size 3 μ Excellement® Z-Media® (high collapse center tube) HZX10 = H size 10 μ Excellement® Z-Media® (high collapse center tube) HZX25 = H size 25 μ Excellement® Z-Media® (high collapse center tube)
PFN40 (Non-bypassing; requires ZX high collapse elements)	9	

BOX 4	BOX 5	BOX 6
<b>Seal Material</b>	<b>Porting</b>	<b>Options</b>
Omit = Buna N  H = EPR  V = Viton®  H.5 = Skydrol® compatibility	O = Manifold  S = SAE-16  B = ISO 228 G-1"	Omit = None  L = Two ¼" NPTF inlet & outlet female test ports U = Schroeder Check 7/16"-20 UNF test point installation in head (upstream)

BOX 7	BOX 8
<b>Dirt Alarm® Options</b>	<b>Dirt Alarm® Location</b>
Omit = None Visual D5 = Visual pop-up Visual with Thermal Lockout D8 = Visual w/ thermal lockout	Omit = Top mounted S = Side mounted

BOX 9
<b>Bowl Drain Options</b>
Omit = None DR = Drain 7/16"-20

#### NOTES:

Box 2. Replacement element part numbers are a combination of Boxes 2, 3 and 4. Example: 5HZ10V

Box 4. For options H, V, and H.5, all aluminum parts are anodized. H.5 seal designation includes the following: EPR seals, stainless steel wire mesh on elements, and light oil coating on housing exterior. Viton® is a registered trademark of DuPont Dow Elastomers. Skydrol® is a registered trademark of Solutia Inc.

Box 5. B porting option supplied with metric mounting holes.

Box 7. Standard indicator setting for non-bypassing model is 50 psi unless otherwise noted.